

Instrument Flying Handbook

2012

U.S. Department of Transportation
FEDERAL AVIATION ADMINISTRATION
Flight Standards Service

Table of Contents

Preface.....	iii	The Profile View.....	1-21
Acknowledgments.....	v	Landing Minimums.....	1-23
Introduction.....	vii	Airport Sketch /Airport Diagram.....	1-27
Is an Instrument Rating Necessary?.....	vii	Inoperative Components.....	1-27
Instrument Rating Requirements.....	vii	RNAV Instrument Approach Charts.....	1-30
Training for the Instrument Rating.....	vii		
Maintaining the Instrument Rating.....	viii		
Table of Contents	ix		
Chapter 1		Chapter 2	
The National Airspace System.....	1-1	The Air Traffic Control System.....	2-1
Introduction.....	1-1	Introduction.....	2-1
Airspace Classification.....	1-2	Communication Equipment.....	2-2
Special Use Airspace.....	1-2	Navigation/Communication Equipment.....	2-2
Federal Airways	1-4	Radar and Transponders.....	2-3
Other Routing.....	1-5	Mode C (Altitude Reporting).....	2-3
IFR En Route Charts.....	1-6	Communication Procedures.....	2-4
Airport Information.....	1-6	Communication Facilities.....	2-4
Chartered IFR Altitudes	1-6	Flight Service Stations (FSS).....	2-4
Navigation Features.....	1-7	ATC Towers.....	2-5
Types of NAVAIDs.....	1-7	Terminal Radar Approach Control (TRACON).....	2-6
Identifying Intersections	1-7	Tower En Route Control (TEC).....	2-7
Other Route Information.....	1-10	Air Route Traffic Control Center (ARTCC)	2-7
Weather Information and Communication		Center Approach/Departure Control	2-7
Features.....	1-10	ATC Inflight Weather Avoidance Assistance.....	2-11
New Technologies	1-10	ATC Radar Weather Displays.....	2-11
Terminal Procedures Publications	1-12	Weather Avoidance Assistance.....	2-11
Departure Procedures	1-12	Approach Control Facility	2-12
Standard Terminal Arrival Routes	1-12	Approach Control Advances.....	2-12
Instrument Approach Procedure Charts	1-12	Precision Runway Monitor (PRM)	2-12
Margin Identification.....	1-12	PRM Radar	2-12
The Pilot Briefing.....	1-16	PRM Benefits.....	2-13
The Plan View.....	1-16	Control Sequence.....	2-13
Terminal Arrival Area (TAA).....	1-18	Letters of Agreement (LOA).....	2-14
Course Reversal Elements in Plan View and			
Profile View.....	1-20	Chapter 3	
Procedure Turns.....	1-20	Human Factors	3-1
Holding in Lieu of Procedure Turn	1-20	Introduction.....	3-1
Teardrop Procedure	1-21	Sensory Systems for Orientation	3-2
		Eyes	3-2
		Vision Under Dim and Bright Illumination.....	3-3

Ears.....	3-4	Lift.....	4-6
Nerves.....	3-5	Pitch/Power Relationship	4-6
Illusions Leading to Spatial Disorientation.....	3-5	Drag Curves	4-6
Vestibular Illusions	3-5	Regions of Command.....	4-7
The Leans.....	3-5	Control Characteristics	4-7
Coriolis Illusion	3-6	Speed Stability.....	4-8
Graveyard Spiral	3-6	Normal Command	4-8
Somatogravic Illusion.....	3-6	Reversed Command.....	4-8
Inversion Illusion	3-6	Trim.....	4-8
Elevator Illusion.....	3-6	Slow-Speed Flight.....	4-8
Visual Illusions.....	3-7	Small Airplanes	4-9
False Horizon.....	3-7	Large Airplanes	4-10
Autokinesis	3-7	Climbs	4-10
Postural Considerations	3-7	Acceleration in Cruise Flight	4-10
Demonstration of Spatial Disorientation	3-7	Turns	4-10
Climbing While Accelerating.....	3-8	Rate of Turn.....	4-11
Climbing While Turning	3-8	Radius of Turn.....	4-11
Diving While Turning	3-8	Coordination of Rudder and Aileron Controls	4-11
Tilting to Right or Left	3-8	Load Factor	4-12
Reversal of Motion.....	3-8	Icing	4-13
Diving or Rolling Beyond the Vertical Plane	3-8	Types of Icing	4-13
Coping with Spatial Disorientation.....	3-8	Structural Icing	4-13
Optical Illusions	3-9	Induction Icing	4-13
Runway Width Illusion	3-9	Clear Ice	4-13
Runway and Terrain Slopes Illusion	3-9	Rime Ice	4-14
Featureless Terrain Illusion	3-9	Mixed Ice.....	4-14
Water Refraction	3-9	General Effects of Icing on Airfoils.....	4-14
Haze.....	3-9	Piper PA-34-200T (Des Moines, Iowa).....	4-16
Fog.....	3-9	Tailplane Stall Symptoms	4-16
Ground Lighting Illusions	3-9	Propeller Icing	4-16
How To Prevent Landing Errors Due to		Effects of Icing on Critical Aircraft Systems	4-16
Optical Illusions	3-9	Flight Instruments.....	4-16
		Stall Warning Systems.....	4-17
		Windshields	4-17
		Antenna Icing	4-17
		Summary	4-17
Chapter 4			
Aerodynamic Factors.....	4-1	Chapter 5	
Introduction.....	4-1	Flight Instruments	5-1
The Wing.....	4-2	Introduction.....	5-1
Review of Basic Aerodynamics.....	4-2	Pitot/Static Systems	5-2
The Four Forces.....	4-2	Static Pressure	5-2
Lift	4-2	Blockage of the Pitot-Static System.....	5-2
Weight.....	4-3	Blocked Pitot System.....	5-2
Thrust.....	4-3	Blocked Static System	5-3
Drag	4-3	Effects of Flight Conditions.....	5-3
Newton's First Law, the Law of Inertia	4-4	Pitot/Static Instruments.....	5-3
Newton's Second Law, the Law of Momentum.....	4-4	Sensitive Altimeter.....	5-3
Newton's Third Law, the Law of Reaction.....	4-4	Principle of Operation.....	5-3
Atmosphere	4-4	Altimeter Errors	5-4
Layers of the Atmosphere	4-5	Cold Weather Altimeter Errors.....	5-5
International Standard Atmosphere (ISA).....	4-5		
Pressure Altitude.....	4-5		
Density Altitude.....	4-6		

ICAO Cold Temperature Error Table	5-5	Terrain Alerting Systems	5-34
Nonstandard Pressure on an Altimeter	5-6	Required Navigation Instrument System Inspection ...	5-36
Altimeter Enhancements (Encoding)	5-7	Systems Preflight Procedures	5-36
Reduced Vertical Separation Minimum (RVSM) ..	5-7	Before Engine Start	5-36
Vertical Speed Indicator (VSI).....	5-8	After Engine Start.....	5-37
Dynamic Pressure Type Instruments	5-8	Taxiing and Takeoff.....	5-37
Airspeed Indicator (ASI).....	5-8	Engine Shut Down	5-38
Types of Airspeed.....	5-9		
Airspeed Color Codes.....	5-10		
Magnetism.....	5-10	Chapter 6, Section I	
The Basic Aviation Magnetic Compass	5-10	Airplane Attitude Instrument Flying Using	
Magnetic Compass Overview	5-10	Analog Instrumentation	6-1
Magnetic Compass Errors.....	5-12	Introduction.....	6-1
The Vertical Card Magnetic Compass	5-15	Learning Methods	6-2
The Flux Gate Compass System	5-15	Attitude Instrument Flying Using the Control and	
Remote Indicating Compass.....	5-15	Performance Method	6-2
Gyroscopic Systems.....	5-16	Control Instruments	6-2
Power Sources	5-17	Performance Instruments	6-2
Pneumatic Systems	5-17	Navigation Instruments	6-2
Vacuum Pump Systems	5-17	Procedural Steps in Using Control	
Electrical Systems.....	5-17	and Performance	6-2
Gyroscopic Instruments	5-19	Aircraft Control During Instrument Flight	6-3
Attitude Indicators.....	5-19	Attitude Instrument Flying Using the Primary and	
Heading Indicators	5-19	Supporting Method.....	6-4
Turn Indicators	5-20	Pitch Control.....	6-4
Turn-and-Slip Indicator	5-20	Bank Control.....	6-7
Turn Coordinator	5-21	Power Control.....	6-8
Flight Support Systems.....	5-22	Trim Control	6-8
Attitude and Heading Reference System (AHRS) ...	5-22	Airplane Trim	6-8
Air Data Computer (ADC).....	5-22	Helicopter Trim	6-10
Analog Pictorial Displays	5-23	Example of Primary and Support Instruments	6-10
Horizontal Situation Indicator (HSI)	5-23	Fundamental Skills.....	6-10
Attitude Direction Indicator (ADI)	5-23	Instrument Cross-Check	6-10
Flight Director System (FDS)	5-23	Common Cross-Check Errors.....	6-11
Integrated Flight Control System	5-25	Instrument Interpretation.....	6-13
Autopilot Systems.....	5-25		
Flight Management Systems (FMS)	5-26	Chapter 6, Section II	
Electronic Flight Instrument Systems	5-27	Airplane Attitude Instrument Flying Using an	
Primary Flight Display (PFD).....	5-27	Electronic Flight Display.....	6-15
Synthetic Vision	5-28	Introduction.....	6-15
Multi-Function Display (MFD).....	5-28	Learning Methods	6-16
Advanced Technology Systems.....	5-28	Control and Performance Method	6-18
Automatic Dependent Surveillance—Broadcast		Control Instruments	6-18
(ADS-B)	5-28	Performance Instruments	6-19
Safety Systems.....	5-29	Navigation Instruments.....	6-19
Radio Altimeters.....	5-29	The Four-Step Process Used to Change Attitude.....	6-19
Traffic Advisory Systems	5-29	Establish.....	6-19
Traffic Information System	5-29	Trim	6-20
Traffic Alert Systems	5-30	Cross-Check.....	6-20
Traffic Avoidance Systems.....	5-30	Adjust.....	6-20

Applying the Four-Step Process.....	6-20	Entry	7-14
Pitch Control.....	6-20	Leveling Off.....	7-16
Bank Control.....	6-20	Descents.....	7-16
Power Control.....	6-21	Entry	7-17
Attitude Instrument Flying—Primary and		Leveling Off.....	7-17
Supporting Method.....	6-21	Common Errors in Straight Climbs and Descents...	7-17
Pitch Control.....	6-22	Turns	7-19
Straight-and-Level Flight.....	6-22	Standard Rate Turns	7-19
Primary Pitch	6-22	Turns to Predetermined Headings	7-20
Primary Bank	6-23	Timed Turns	7-21
Primary Yaw	6-23	Compass Turns	7-21
Primary Power	6-24	Steep Turns.....	7-22
Fundamental Skills of Attitude Instrument Flying	6-24	Climbing and Descending Turns.....	7-24
Instrument Cross-Check	6-24	Change of Airspeed During Turns	7-24
Scanning Techniques	6-24	Common Errors in Turns.....	7-25
Selected Radial Cross-Check	6-24	Pitch	7-25
Starting the Scan	6-24	Bank	7-25
Trend Indicators.....	6-26	Power	7-26
Common Errors.....	6-27	Trim	7-26
Fixation.....	6-27	Errors During Compass Turns	7-26
Omission.....	6-28	Approach to Stall	7-26
Emphasis	6-28	Unusual Attitudes and Recoveries	7-26
Chapter 7, Section I		Recognizing Unusual Attitudes.....	7-27
Airplane Basic Flight Maneuvers Using		Recovery from Unusual Attitudes.....	7-27
Analog Instrumentation	7-1	Nose-High Attitudes.....	7-27
Introduction.....	7-1	Nose-Low Attitudes	7-28
Straight-and-Level Flight.....	7-2	Common Errors in Unusual Attitudes	7-28
Pitch Control	7-2	Instrument Takeoff.....	7-29
Attitude Indicator.....	7-2	Common Errors in Instrument Takeoffs	7-29
Altimeter.....	7-3	Basic Instrument Flight Patterns	7-30
Vertical Speed Indicator (VSI)	7-4	Racetrack Pattern.....	7-30
Airspeed Indicator (ASI)	7-6	Procedure Turn	7-30
Bank Control	7-6	Standard 45° Procedure Turn	7-30
Attitude Indicator.....	7-6	80/260 Procedure Turn.....	7-31
Heading Indicator	7-7	Teardrop Patterns	7-31
Turn Coordinator	7-7	Circling Approach Patterns	7-32
Turn-and-Slip Indicator (Needle and Ball).....	7-8	Pattern I.....	7-32
Power Control	7-8	Pattern II	7-32
Power Settings	7-9	Chapter 7, Section II	
Airspeed Changes in Straight-and-Level Flight ...	7-11	Airplane Basic Flight Maneuvers Using an	
Trim Technique	7-12	Electronic Flight Display.....	7-33
Common Errors in Straight-and-Level Flight	7-12	Introduction.....	7-33
Pitch	7-12	Straight-and-Level Flight.....	7-34
Heading.....	7-13	Pitch Control	7-34
Power.....	7-13	Attitude Indicator.....	7-34
Trim	7-13	Altimeter.....	7-36
Straight Climbs and Descents	7-14	Partial Panel Flight	7-36
Climbs	7-14	VSI Tape.....	7-36

Chapter I

The National Airspace System

Introduction

The National Airspace System (NAS) is the network of United States airspace: air navigation facilities, equipment, services, airports or landing areas, aeronautical charts, information/services, rules, regulations, procedures, technical information, manpower, and material. Included are system components shared jointly with the military. The system's present configuration is a reflection of the technological advances concerning the speed and altitude capability of jet aircraft, as well as the complexity of microchip and satellite-based navigation equipment. To conform to international aviation standards, the United States adopted the primary elements of the classification system developed by the International Civil Aviation Organization (ICAO).

This chapter is a general discussion of airspace classification; en route, terminal, and approach procedures; and operations within the NAS. Detailed information on the classification of airspace, operating procedures, and restrictions is found in the Aeronautical Information Manual (AIM).

Entry Requirements

Minimum Pilot
QualificationsTwo-Way Radio
Communications

Special VFR Allowed

VFR Visibility Minimum

VFR Minimum
Distance from Clouds

VFR Aircraft Separation

Traffic Advisories

Airport Application

PINE BLUFF (T)
116.5 PBF 80(Y) 22
67° 44' N 92° 55' WHARRISON
112.5 HRO 72
N36° 10'

000

P

V4

V193

Airspace Classification

Airspace in the United States [Figure 1-1] is designated as follows:

1. Class A. Generally, airspace from 18,000 feet mean sea level (MSL) up to and including flight level (FL) 600, including the airspace overlying the waters within 12 nautical miles (NM) of the coast of the 48 contiguous states and Alaska. Unless otherwise authorized, all pilots must operate their aircraft under instrument flight rules (IFR).
2. Class B. Generally, airspace from the surface to 10,000 feet MSL surrounding the nation's busiest airports in terms of airport operations or passenger enplanements. The configuration of each Class B airspace area is individually tailored, consists of a surface area and two or more layers (some Class B airspace areas resemble upside-down wedding cakes), and is designed to contain all published instrument procedures once an aircraft enters the airspace. An air traffic control (ATC) clearance is required for all aircraft to operate in the area, and all aircraft that are so cleared receive separation services within the airspace.
3. Class C. Generally, airspace from the surface to 4,000 feet above the airport elevation (charted in MSL) surrounding those airports that have an operational control tower are serviced by a radar approach control and have a certain number of IFR operations or passenger enplanements. Although the configuration of each Class C area is individually tailored, the airspace usually consists of a surface area with a 5 NM radius, an outer circle with a 10 NM radius that extends from 1,200 feet to 4,000 feet above the airport elevation and an outer area. Each aircraft must establish two-way radio communications with the ATC facility providing air traffic services prior to entering the airspace and thereafter maintain those communications while within the airspace.
4. Class D. Generally, airspace from the surface to 2,500 feet above the airport elevation (charted in MSL) surrounding those airports that have an operational control tower. The configuration of each Class D airspace area is individually tailored and, when instrument procedures are published, the airspace normally designed to contain the procedures. Arrival extensions for instrument approach procedures (IAPs) may be Class D or Class E airspace. Unless otherwise authorized, each aircraft must establish two-way radio communications with the ATC facility providing air traffic services prior to entering the airspace and thereafter maintain those communications while in the airspace.
5. Class E. Generally, if the airspace is not Class A, B, C, or D, and is controlled airspace, then it is Class E airspace. Class E airspace extends upward from either the surface or a designated altitude to the overlying or adjacent controlled airspace. When designated as a surface area, the airspace is configured to contain all instrument procedures. Also in this class are federal airways, airspace beginning at either 700 or 1,200 feet above ground level (AGL) used to transition to and from the terminal or en route environment, and en route domestic and offshore airspace areas designated below 18,000 feet MSL. Unless designated at a lower altitude, Class E airspace begins at 14,500 MSL over the United States, including that airspace overlying the waters within 12 NM of the coast of the 48 contiguous states and Alaska, up to but not including 18,000 feet MSL, and the airspace above FL 600.
6. Class G. Airspace not designated as Class A, B, C, D, or E. Class G airspace is essentially uncontrolled by ATC except when associated with a temporary control tower.

Special Use Airspace

Special use airspace is the designation for airspace in which certain activities must be confined or where limitations may be imposed on aircraft operations that are not part of those activities. Certain special use airspace areas can create limitations on the mixed use of airspace. The special use airspace depicted on instrument charts includes the area name or number, effective altitude, time and weather conditions of operation, the controlling agency, and the chart panel location. On National Aeronautical Navigation Products (AeroNav Products) en route charts, this information is available on one of the end panels.

Prohibited areas contain airspace of defined dimensions within which the flight of aircraft is prohibited. Such areas are established for security or other reasons associated with the national welfare. These areas are published in the Federal Register and are depicted on aeronautical charts. The area is charted as a "P" followed by a number (e.g., "P-123").

Restricted areas are areas where operations are hazardous to nonparticipating aircraft and contain airspace within which the flight of aircraft, while not wholly prohibited, is subject to restrictions. Activities within these areas must be confined because of their nature, or limitations may be imposed upon aircraft operations that are not a part of those activities, or both. Restricted areas denote the existence of unusual, often invisible, hazards to aircraft (e.g., artillery firing, aerial gunnery, or guided missiles). IFR flights may be authorized to transit the airspace and are routed accordingly. Penetration

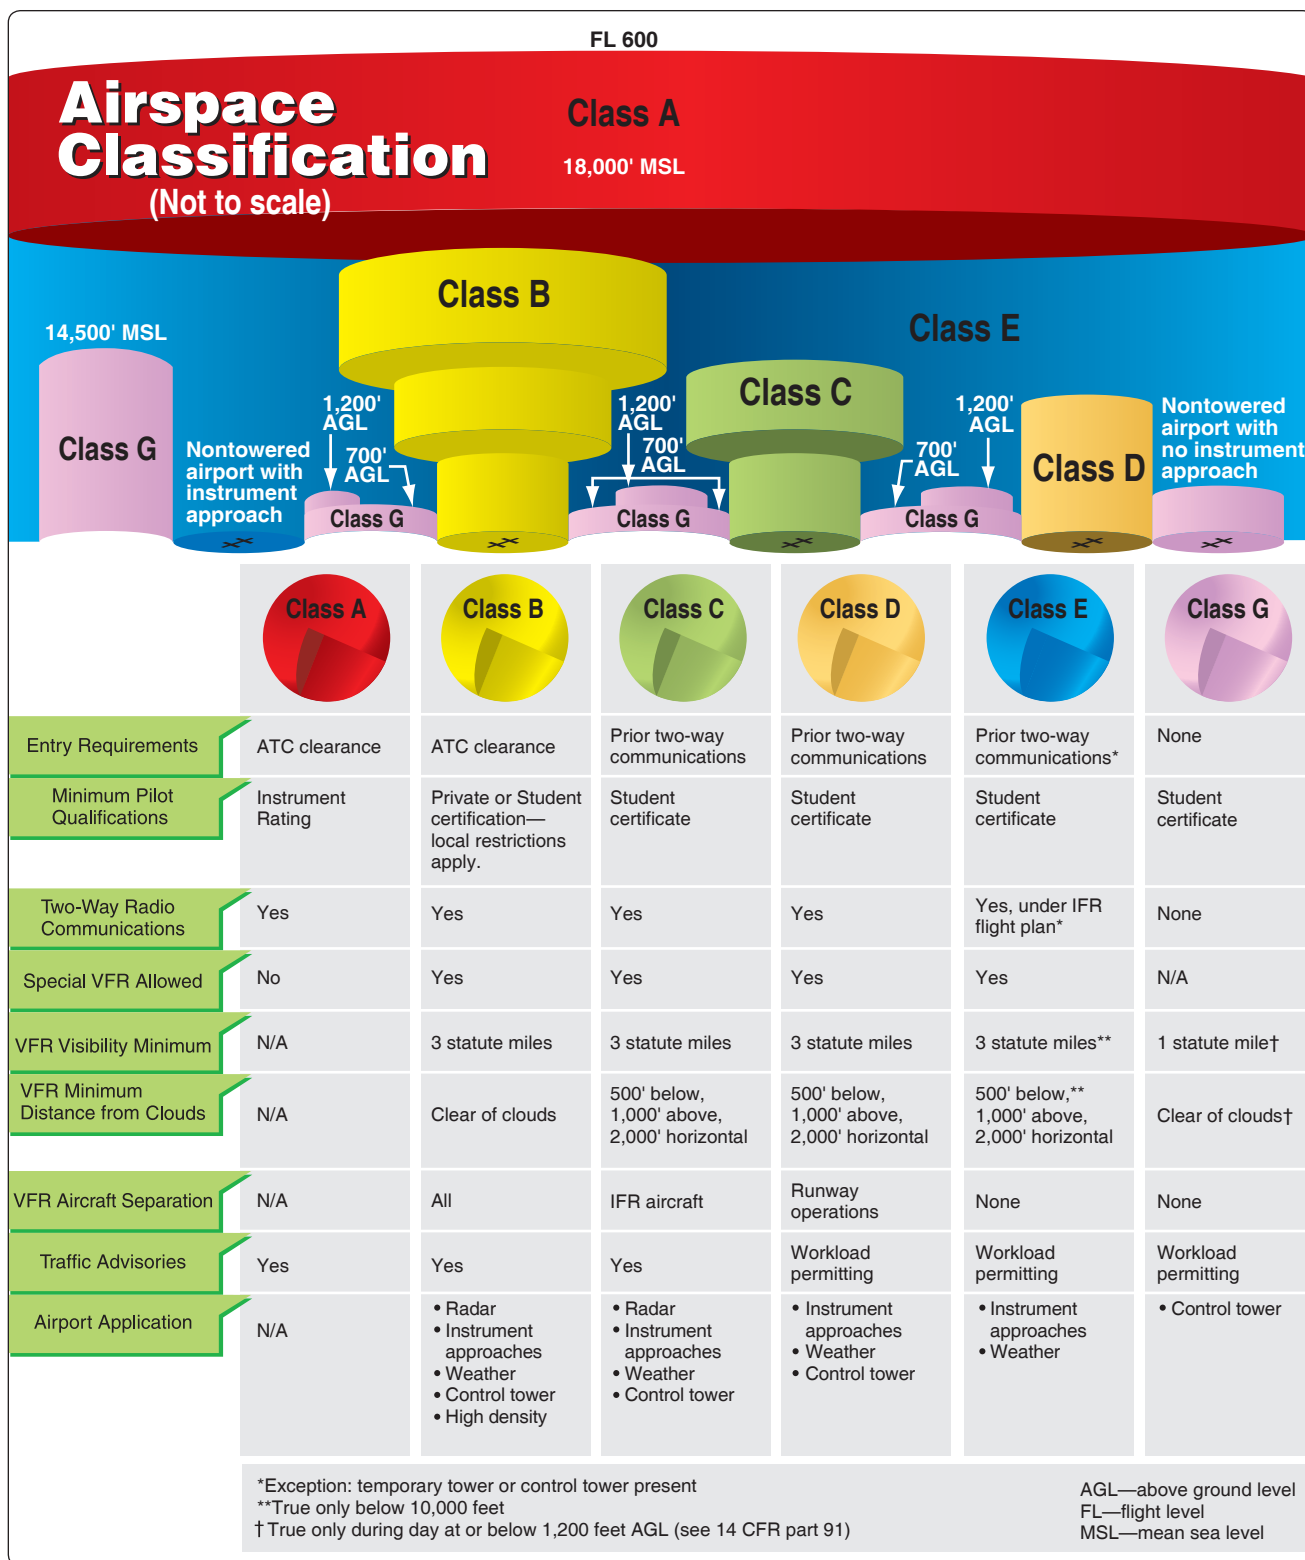


Figure 1-1. Airspace classifications.

of restricted areas without authorization from the using or controlling agency may be extremely hazardous to the aircraft and its occupants. ATC facilities apply the following procedures when aircraft are operating on an IFR clearance (including those cleared by ATC to maintain visual flight rules (VFR)-On-Top) via a route that lies within joint-use restricted airspace:

1. If the restricted area is not active and has been released to the Federal Aviation Administration (FAA), the ATC facility will allow the aircraft to operate in the restricted airspace without issuing specific clearance for it to do so.
2. If the restricted area is active and has not been released to the FAA, the ATC facility will issue a clearance that will ensure the aircraft avoids the restricted airspace.

Restricted areas are charted with an “R” followed by a number (e.g., “R-5701”) and are depicted on the en route chart appropriate for use at the altitude or FL being flown.

Warning areas are similar in nature to restricted areas; however, the U.S. Government does not have sole jurisdiction over the airspace. A warning area is airspace of defined dimensions, extending from 12 NM outward from the coast of the United States, containing activity that may be hazardous to nonparticipating aircraft. The purpose of such areas is to warn nonparticipating pilots of the potential danger. A warning area may be located over domestic or international waters or both. The airspace is designated with a “W” followed by a number (e.g., “W-123”).

Military operations areas (MOAs) consist of airspace with defined vertical and lateral limits established for the purpose of separating certain military training activities from IFR traffic. Whenever an MOA is being used, nonparticipating IFR traffic may be cleared through an MOA if IFR separation can be provided by ATC. Otherwise, ATC will reroute or restrict nonparticipating IFR traffic. MOAs are depicted on sectional, VFR terminal area, and en route low altitude charts and are not numbered (e.g., “Boardman MOA”).

Alert areas are depicted on aeronautical charts with an “A” followed by a number (e.g., “A-123”) to inform nonparticipating pilots of areas that may contain a high volume of pilot training or an unusual type of aerial activity. Pilots should exercise caution in alert areas. All activity within an alert area shall be conducted in accordance with regulations, without waiver, and pilots of participating aircraft, as well as pilots transiting the area, shall be equally responsible for collision avoidance.

Military Training Routes (MTRs) are routes used by military aircraft to maintain proficiency in tactical flying. These routes are usually established below 10,000 feet MSL for operations at speeds in excess of 250 knots. Some route segments may be defined at higher altitudes for purposes of route continuity. Routes are identified as IFR (IR) and VFR (VR) followed by a number. MTRs with no segment above 1,500 feet AGL are identified by four number characters (e.g., IR1206, VR1207). MTRs that include one or more segments above 1,500 feet AGL are identified by three number characters (e.g., IR206, VR207). IFR low altitude en route charts depict all IR routes and all VR routes that accommodate operations above 1,500 feet AGL. IR routes are conducted in accordance with IFR regardless of weather conditions.

Temporary flight restrictions (TFRs) are put into effect when traffic in the airspace would endanger or hamper air or ground activities in the designated area. For example, a forest fire, chemical accident, flood, or disaster-relief effort could warrant a TFR, which would be issued as a Notice to Airmen (NOTAM).

National Security Areas (NSAs) consist of airspace with defined vertical and lateral dimensions established at locations where there is a requirement for increased security and safety of ground facilities. Flight in NSAs may be temporarily prohibited by regulation under the provisions of Title 14 of the Code of Federal Regulations (14 CFR) part 99 and prohibitions will be disseminated via NOTAM.

Federal Airways

The primary means for routing aircraft operating under IFR is the Federal Airways System. Each Federal airway is based on a centerline that extends from one navigational aid (NAVAID)/waypoint/fix/intersection to another NAVAID/waypoint/fix/intersection specified for that airway. A Federal airway includes the airspace within parallel boundary lines 4 NM to each side of the centerline. As in all instrument flight, courses are magnetic, and distances are in NM. The airspace of a Federal airway has a floor of 1,200 feet AGL, unless otherwise specified. A Federal airway does not include the airspace of a prohibited area.

Victor airways include the airspace extending from 1,200 feet AGL up to, but not including 18,000 feet MSL. The airways are designated on sectional and IFR low altitude en route charts with the letter “V” followed by a number (e.g., “V23”). Typically, Victor airways are given odd numbers when oriented north/south and even numbers when oriented east/west. If more than one airway coincides on a route segment, the numbers are listed serially (e.g., “V287-495-500”). [Figure 1-2]

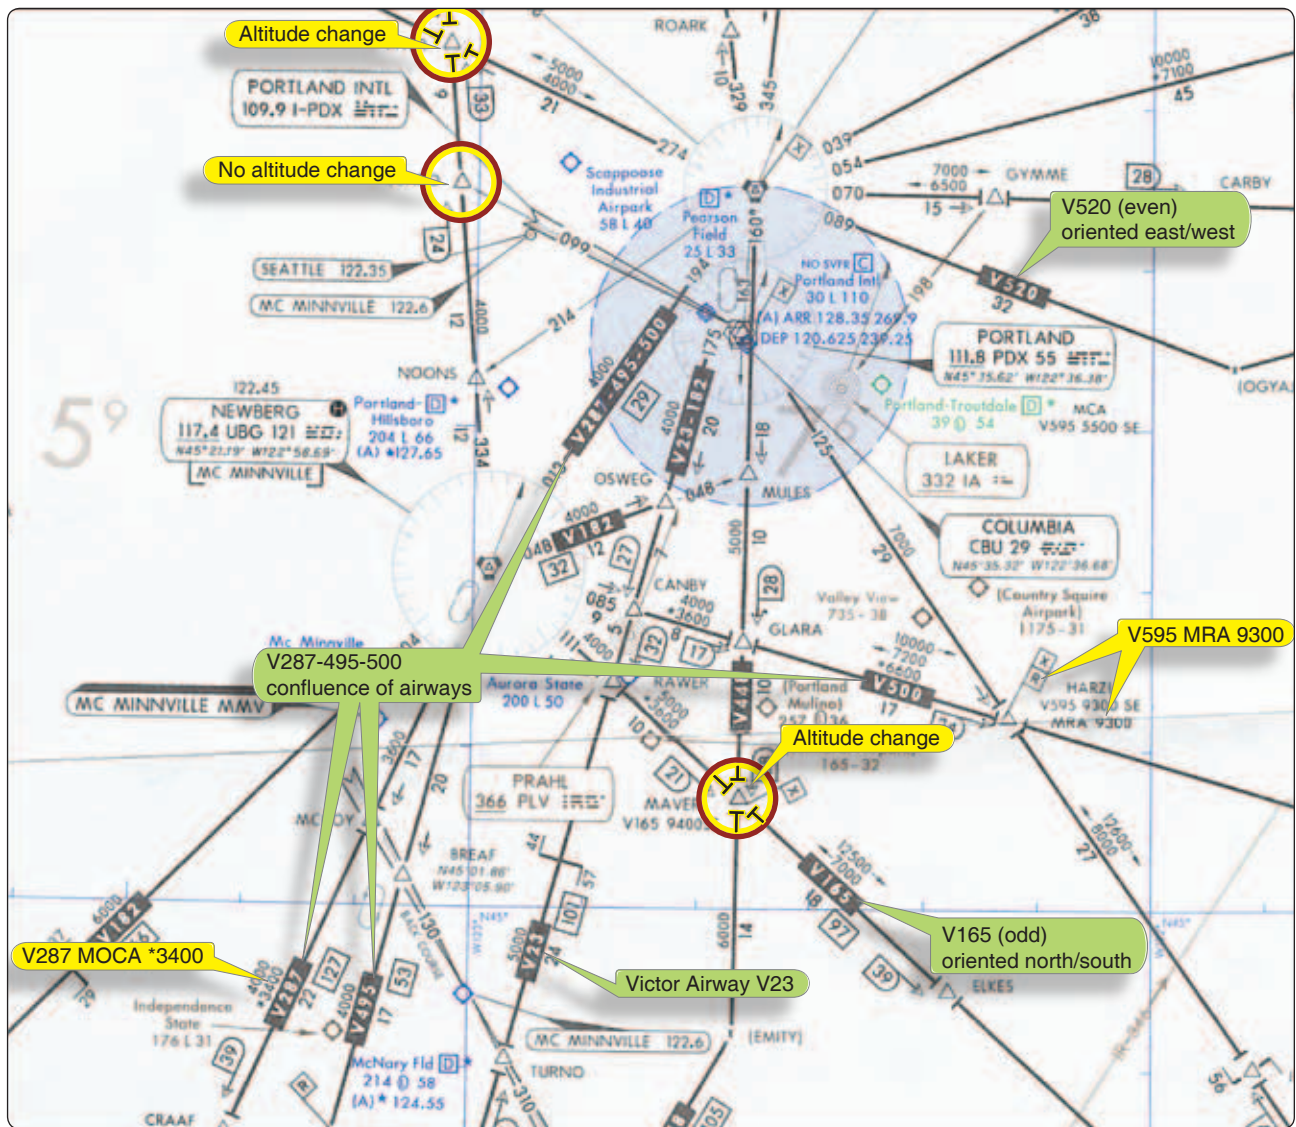


Figure 1-2. Victor airways and charted IFR altitudes.

Jet routes exist only in Class A airspace, from 18,000 feet MSL to FL 450, and are depicted on high-altitude en route charts. The letter “J” precedes a number to label the airway (e.g., J12).

Area navigation (RNAV) routes have been established in both the low-altitude and the high-altitude structures in recent years and are depicted on the en route low and high chart series. High altitude RNAV routes are identified with a “Q” prefix (except the Q-routes in the Gulf of Mexico) and low altitude RNAV routes are identified with a “T” prefix. RNAV routes and data are depicted in aeronautical blue.

In addition to the published routes, a random RNAV route may be flown under IFR if it is approved by ATC. Random RNAV routes are direct routes, based on RNAV capability, between waypoints defined in terms of latitude/longitude coordinates, degree-distance fixes, or offsets from established routes/airways at a specified distance and direction.

Radar monitoring by ATC is required on all random RNAV routes. These routes can only be approved in a radar environment. Factors that are considered by ATC in approving random RNAV routes include the capability to provide radar monitoring and compatibility with traffic volume and flow. ATC will radar monitor each flight; however, navigation on the random RNAV route is the responsibility of the pilot.

Other Routing

Preferred IFR routes have been established between major terminals to guide pilots in planning their routes of flight, minimizing route changes, and aiding in the orderly management of air traffic on Federal airways. Low and high altitude preferred routes are listed in the Airport/Facility Directory (A/FD). To use a preferred route, reference the departure and arrival airports; if a routing exists for your flight, then airway instructions are listed.

Tower En Route Control (TEC) is an ATC program that uses overlapping approach control radar services to provide IFR clearances. By using TEC, a pilot is routed by airport control towers. Some advantages include abbreviated filing procedures and reduced traffic separation requirements. TEC is dependent upon the ATC's workload, and the procedure varies among locales.

The latest version of Advisory Circular (AC) 90-91, North American Route Program (NRP), provides guidance to users of the NAS for participation in the NRP. All flights operating at or above FL 290 within the conterminous United States and Canada are eligible to participate in the NRP, the primary purpose of which is to allow operators to plan minimum time/cost routes that may be off the prescribed route structure. NRP aircraft are not subject to route-limiting restrictions (e.g., published preferred IFR routes) beyond a 200 NM radius of their point of departure or destination.

IFR En Route Charts


The objective of IFR en route flight is to navigate within the lateral limits of a designated airway at an altitude consistent with the ATC clearance. Your ability to fly instruments safely and competently in the system is greatly enhanced by understanding the vast array of data available to the pilot on instrument charts. AeroNav Products maintains and produces the charts for the U.S. Government.

En route high-altitude charts provide aeronautical information for en route instrument navigation at or above 18,000 feet MSL. Information includes the portrayal of Jet and RNAV routes, identification and frequencies of radio aids, selected airports, distances, time zones, special use airspace, and related information. Established jet routes from 18,000 feet MSL to FL 450 use NAVAIDs not more than 260 NM apart. The charts are revised every 56 days.

To effectively depart from one airport and navigate en route under instrument conditions, a pilot needs the appropriate IFR en route low-altitude chart(s). The IFR low altitude en route chart is the instrument equivalent of the sectional chart. When folded, the cover of the AeroNav Products en route chart displays an index map of the United States showing the coverage areas. Cities near congested airspace are shown in black type and their associated area chart is listed in the box in the lower left-hand corner of the map coverage box. Also noted is an explanation of the off-route obstruction clearance altitude (OROCA). The effective date of the chart is printed on the other side of the folded chart. Information concerning MTRs is also included on the chart cover. The en route charts are revised every 56 days.

When the AeroNav Products en route chart is unfolded, the legend is displayed and provides information concerning airports, NAVAIDs, communications, air traffic services, and airspace.

Airport Information

Airport information is provided in the legend, and the symbols used for the airport name, elevation, and runway length are similar to the sectional chart presentation. Associated city names are shown for public airports only. FAA identifiers are shown for all airports. ICAO identifiers are also shown for airports outside of the contiguous United States. Instrument approaches can be found at airports with blue or green symbols, while the brown airport symbol denotes airports that do not have instrument approaches. Stars are used to indicate the part-time nature of tower operations, Automatic Terminal Information Service (ATIS) frequencies, part-time or on request lighting facilities, and part-time airspace classifications. A box after an airport name with a "C" or "D" inside (e.g., ) indicates Class C and D airspace, respectively, per *Figure 1-3*.

Charted IFR Altitudes

The minimum en route altitude (MEA) ensures a navigation signal strong enough for adequate reception by the aircraft navigation (NAV) receiver and obstacle clearance along the airway. Communication is not necessarily guaranteed with MEA compliance. The obstacle clearance, within the limits of the airway, is typically 1,000 feet in non-mountainous areas and 2,000 feet in designated mountainous areas. MEAs can be authorized with breaks in the signal coverage; if this is the case, the AeroNav Products en route chart notes "MEA GAP" parallel to the affected airway. MEAs are usually bidirectional; however, they can be single-directional. Arrows are used to indicate the direction to which the MEA applies.

The minimum obstruction clearance altitude (MOCA), as the name suggests, provides the same obstruction clearance as an MEA; however, the NAV signal reception is ensured only within 22 NM of the closest NAVAID defining the route. The MOCA is listed below the MEA and indicated on AeroNav Products charts by a leading asterisk (e.g., "*3400"—see *Figure 1-2*, V287 at bottom left).

The minimum reception altitude (MRA) identifies the lowest altitude at which an intersection can be determined from an off-course NAVAID. If the reception is line-of-sight based, signal coverage only extends to the MRA or above. However, if the aircraft is equipped with distance measuring equipment (DME) and the chart indicates the intersection can be identified with such equipment, the pilot could define the