

AVIATION MAINTENANCE TECHNICIAN CERTIFICATION SERIES

MAINTENANCE PRACTICES

7



EASA 2023-889 COMPLIANT

Update notices for this book will be available online at www.actechbooks.com/revisions.html
If you would like to be notified when changes occur, please join our mailing list at www.actechbooks.com

VERSION	EFFECTIVE DATE	DESCRIPTION OF REVISION(S)
001	2020.02	Module creation and release.
001.1	2021.10	Corrected description of file types (Submodule 7, pages 3.15-3.16).
001.2	2023.04	Submodule 8 - Added content on Friction and Mechanical lock blind rivet procedures. Inclusion of Measurement Standards for clarification, page iv. Minor appearance and format updates.
002	2024.04	Regulatory update for EASA 2023-989 Compliance.

Module was reorganized based upon the EASA 2023-989 subject criteria. Enhancements included in this version 002 are:

- 7.1 *Fuel Tank Safety* - topic added.
- 7.1 *Ballistic Parachutes* - topic added.
- 7.4 *Avionics Test Equipment* - topic moved to Modules 11, 12, and 13 per 2023-989.
- 7.7 *Connector Pin Wire Support* - topic added.
- 7.7 *Soldering Electrical Wires* - topic added.
- 7.7 *HIRF Protection Principles* - topic added.
- 7.8 *Special Purpose Rivets and Fasteners* - topic added.
- 7.9 *Visual Inspection of Springs* - topic added.
- 7.9 *Inspecting Squareness of Springs* - topic added.
- 7.13 *Cable Tension Regulators* - topic added.
- 7.13 *Cable Guides and Adjustment* - topic added.
- 7.14 *Additive Manufacturing* - topic added.
- 7.15 *Welding* - submodule deleted per 2023-989.
- 7.18 *Structural Repair Manuals* - topic added.
- 7.18 *Dye Penetrant Color Contrast* - topic added.
- 7.19 *HIRF Test Equipment* - topic added.
- 7.21 *Documentation and Communication* - new submodule added.

TABLE OF CONTENTS

MAINTENANCE PRACTICES

Revision Log	iii
Measurement Standards	iv
Basic Knowledge Requirements	v
Part 66 Basic Knowledge Requirements	vi
Table of Contents.	ix

7.1 - SAFETY PRECAUTIONS — AIRCRAFT AND WORKSHOP 1.1

Safety Around Electricity	1.1
Fire Safety Around Electricity	1.1
Safety Around Compressed Gases	1.2
Oxygen Safety Considerations	1.2
Safety Around Hazardous Materials.	1.2
Safety Around Machine Tools.	1.3
Fuel Tank Entry Procedures and Precautions	1.4
Fuel Tank Entry Procedures and Precautions	1.4
Chemical Hazards	1.4
Physical Hazards	1.4
Preparation for Entry.	1.5
Ensuring Adequate Ventilation	1.5
Ventilation Techniques	1.5
Monitoring Air in Fuel Tanks.	1.5
Conditions Required for Entry	1.5
Communication	1.5
Respiratory Protection	1.5
Electrically Powered Equipment	1.5
Airplane Damage Considerations	1.6
Ballistic Recovery Systems	1.6
Awareness and Precautions Regarding Ballistic Recovery Systems.	1.6
Basic Understanding	1.6
Primary Components.	1.6
Safety Around Ballistic Recovery Systems	1.6
Inspection and Maintenance	1.6
Installation and Removal.	1.7
Fire Safety	1.7
Requirements for a Fire to Occur	1.7
Classification of Fires.	1.7
Ordinary Combustibles	1.7
Flammable Liquid and Gas	1.8
Electrical	1.8
Metal	1.8
Cooking Oils	1.8
European Standards.	1.8
Fire Extinguishers	1.9
Identifying Fire Extinguishers	1.11
Inspection of Fire Extinguishers	1.11
Using Fire Extinguishers.	1.12
Flight Line Safety	1.12
Hearing Protection	1.12
Foreign Object Damage (FOD)	1.12
Safety Around Airplanes.	1.12
Safety Around Helicopters	1.12
Submodule 1 Practice Questions.	1.13
Submodule 1 Practice Answers	1.14

7.2 - WORKSHOP PRACTICES.....2.1

Care and Control of Tools; Use of Workshop Materials.	2.1
Care of Tools	2.1
Benches	2.1
Vices	2.1
Drilling Machines	2.1
Grinder.	2.1
Motor Drives	2.2
Measuring Instruments	2.2
Drills and Reamers	2.2
Control of Tools.	2.2
Tool Control Procedures	2.2
Workshop Materials	2.3
Dimensions, Allowances and Tolerances; Workmanship Standards	2.3
Dimensions, Allowances, and Tolerances	2.3
Standards of Workmanship	2.4
Tool Calibration.	2.4
Submodule 2 Practice Questions.	2.7
Submodule 2 Practice Answers	2.8

7.3 - TOOLS.....3.1

Common Hand Tools	3.1
Screwdrivers.	3.1
Pliers and Plier-Type Cutting Tools	3.2
Clamps and Vises.	3.3
C-Clamps.	3.3
Vises	3.3
Hammers and Mallets	3.3
Punches	3.4
Wrenches	3.4
Open-End Wrenches.	3.5
Box-End Wrenches	3.5
Socket Wrenches	3.5
Adjustable Wrenches	3.5
Special Wrenches.	3.5
Strap Wrenches	3.6
Impact Wrenches.	3.7
Torque Wrenches	3.7
Torque Tables.	3.8
Cutting Tools.	3.8
Hand Snips	3.9
Metal Shears	3.10
Hacksaws	3.10
Chisels	3.10
Files	3.11
File Types and Use.	3.12
Commonly Used Files	3.12
Care of Files.	3.13
Burring Tools.	3.13
Reamers	3.13
Taps and Dies.	3.14
Common Power Tools	3.16
Saws	3.16
Circular Cutting Saws.	3.16
Kett Saw.	3.16

TABLE OF CONTENTS

Pneumatic Circular-Cutting Saw	3.16	Twist Drill Bits	3.29
Reciprocating Saw	3.16	Cobalt Alloy Drill Bits	3.29
Die Grinders	3.17	Step Drill Bits	3.29
Cut-Off Wheels	3.17	Twist Drill Construction and Sizes	3.29
Nibblers	3.17	Drill Bit Sizes	3.30
Table Top, and Bench Tools	3.17	Hole Drilling Techniques	3.31
Notchers	3.17	Drilling Large Holes	3.34
Band Saws	3.17	Drill Lubrication	3.34
Metal Shears	3.18	Drill Accessories	3.34
Throatless Shears	3.18	Drill Stops	3.34
Scroll Shears	3.18	Drill Bushings	3.34
Rotary Punch Press	3.18	Drill Bushing Holder	3.34
Foot Operated Shears	3.18	Precision Measuring Tools	3.35
Squaring Shears	3.18	Rules	3.35
Sanders	3.19	Combination Sets	3.35
Disk Sander	3.19	Scriber	3.35
Belt Sander	3.19	Dividers and Pencil Compasses	3.35
Grinders	3.19	Calipers	3.36
Grinding Wheels	3.20	Micrometer Calipers	3.37
Bending Tools	3.20	Micrometer Parts	3.37
Bar Folding Machine	3.21	Reading a Micrometer	3.37
Cornice Brake	3.21	Vernier Scale	3.38
Box and Pan Brake	3.21	Using a Micrometer	3.38
Press Brake	3.22	Dial Indicator	3.39
Slip Roll Former	3.22	Slide Calipers	3.39
Rotary Machine	3.23	Lubrication Equipment	3.39
Shrinking, Stretching Tools and Procedures	3.23	Electrical Test Equipment	3.40
Shrinking Tools	3.23	DC Measuring Equipment	3.40
Stretching Tools	3.24	D'Arsonval Meter Movement	3.40
Forming Tools and Procedures	3.24	Current Sensitivity and Resistance	3.41
Stretch Forming	3.24	Dampening	3.41
Drop Hammer	3.24	Electrical Dampening	3.41
Hydropress Forming	3.24	Mechanical Dampening	3.41
Spin Forming	3.24	Multirange Ammeter	3.42
Forming with an English Wheel	3.25	Precautions	3.42
Piccolo Former	3.25	Voltmeters	3.42
Manual Sheet Metal Shrinker	3.25	Voltmeter Sensitivity	3.42
Hand-Operated Shrinker/Stretcher	3.26	MultiRange Voltmeters	3.42
Forming Blocks	3.26	Voltmeter Circuit Connections	3.43
Dollies and Stakes	3.26	Influence of the Voltmeter in the Circuit	3.43
Hardwood Form Blocks	3.26	Ohmmeter	3.43
V-Blocks	3.26	Zero Adjustment	3.43
Shrinking Blocks	3.26	Ohmmeter Scale	3.43
Sandbags	3.26	Multirange Ohmmeter	3.44
Hammers and Mallets	3.26	Megger (Megohmmeter)	3.44
Drilling	3.26	AC Measuring Equipment	3.45
Portable Power Drills	3.27	Electrodynamometer Meter Movement	3.46
Pneumatic Drill Motors	3.27	Moving Iron Vane Meter	3.46
Angled Drill Motors	3.27	Inclined Coil Iron Vane Meter	3.47
Two Hole Drill Motors	3.27	Varmeters	3.47
Drill Extension and Adapters	3.27	Wattmeter	3.47
Extension Drill Bits	3.27	Oscilloscope	3.47
Angle Adapters	3.28	Horizontal Deflection	3.48
Snake Attachment	3.28	Vertical Deflection	3.49
Drill Press	3.28	Tracing a Sine Wave	3.49
Types of Drill Bits	3.28	Control Features on an Oscilloscope	3.49

TABLE OF CONTENTS

Flat Panel Color Displays for Oscilloscopes	3.50	Detail View	5.9
Digital Multimeters	3.50	Pictorial Drawings	5.10
Basic Circuit Analysis and Troubleshooting	3.51	Perspective Drawings	5.10
Voltage Measurement	3.51	Isometric Drawings	5.10
Current Measurement	3.51	Oblique Drawings	5.10
Checking Resistance	3.52	Exploded View Drawings	5.10
Continuity Checks	3.52	Lines and Their Meanings	5.10
Capacitance Measurement	3.52	Centerlines	5.10
Inductance Measurement	3.53	Dimension Lines	5.10
Troubleshooting the Open Faults in Series Circuits	3.53	Extension Lines	5.11
Tracing Opens with the Voltmeter	3.54	Sectioning Lines	5.12
Tracing Opens with the Ohmmeter	3.54	Phantom Lines	5.12
Troubleshooting the Shorting Faults in Series Circuits	3.54	Break Lines	5.12
Tracing Shorts with the Ohmmeter	3.55	Leader Lines	5.12
Tracing Shorts with the Voltmeter	3.55	Hidden Lines	5.12
Troubleshooting the Open Faults in Parallel Circuits	3.55	Outline or Visible Lines	5.12
Tracing an Open with an Ammeter	3.56	Stitch Lines	5.12
Tracing an Open with an Ohmmeter	3.56	Cutting Plane and Viewing Plane Lines	5.12
Troubleshooting the Shorting Faults in Parallel Circuits	3.56	Drawing Symbols	5.12
Troubleshooting the Shorting Faults in Series-Parallel Circuits	3.56	Material Symbols	5.13
Tracing Opens with the Voltmeter	3.57	Shape Symbols	5.13
Submodule 3 Practice Questions	3.59	Electrical Symbols	5.13
Submodule 3 Practice Answers	3.60	Care of Drafting Tools	5.13
Submodule 3 Practice Questions	3.61	Title Blocks	5.13
Submodule 3 Practice Answers	3.62	Drawing or Print Numbers	5.13
7.4 - RESERVED	4.1	Reference and Dash Numbers	5.13
This submodule is reserved by EASA for future use	4.1	Computerized Presentations	5.14
7.5 - ENGINEERING DRAWINGS, DIAGRAMS, AND STANDARDS 5.1		Microfilm and Microfiche	5.14
Purpose and Function of Aircraft Drawings	5.1	Digital Images	5.14
Drawings and Diagrams; Symbols, Dimensions, Tolerances, and Projections	5.1	Specification 100 of the Air Transport Association (ATA)	5.16
Drawing Types	5.1	ATA 100 and iSpec 2200	5.16
Detail Drawings	5.1	Aeronautical Standards	5.17
Assembly Drawings	5.2	ISO	5.17
Installation Drawings	5.2	AN (Army/Navy)	5.18
Sectional View Drawings	5.2	MS (Military Standard)	5.18
Full Section	5.2	NAS (National Aerospace Standard)	5.18
Half Section	5.2	BS (British Standards)	5.18
Revolved Section	5.2	Wiring and Schematic Diagrams	5.18
Removed Section	5.2	Diagrams	5.18
Drawing Standards	5.2	Installation Diagrams	5.18
Bill of Material	5.2	Schematic Diagrams	5.18
Other Drawing Data	5.2	Block Diagrams	5.18
Revision Block	5.2	Wiring Diagrams (Schematics)	5.18
Notes	5.2	Flowcharts	5.18
Zone Numbers	5.2	Troubleshooting Flowchart	5.18
Station Numbers and Location Identification on Aircraft	5.2	Logic Flowchart	5.18
Allowances and Tolerances	5.6	Submodule 5 Practice Questions	5.23
Finish Marks	5.8	Submodule 5 Practice Answers	5.24
Scale	5.8	7.6 - FITS AND CLEARANCES	6.1
Methods of Illustration	5.8	Drill Sizes for Bolt Holes; Classes of Fits	6.1
Applied Geometry	5.8	Accuracy of Drilled Holes	6.1
Orthographic Projection	5.8	Classes of Fit	6.1
		Common System of Fits and Clearances	6.2
		British Standards BS 4500 System	6.2
		BS 4500 Definitions:	6.2

TABLE OF CONTENTS

BS 4500 Basic Hole System	6.3	Twisting Wires	7.10
BS 4500 Basic Shaft System	6.3	Spliced Connections In Wire Bundles	7.10
Basic Hole Method - Metric	6.3	Lacing and Tying Wire Bundles	7.10
Dimensions, Allowances and Tolerances	6.3	Bend Radii	7.11
Dimensions	6.3	Wire Protection	7.11
Allowances	6.3	Protection Against Chafing	7.11
Tolerances	6.4	Protection Against High Temperature	7.11
Unilateral and Bilateral Tolerances	6.4	Protection Against Solvents and Fluids	7.12
Schedule of Fits and Clearances	6.4	Protection of Wires in Wheel Well Areas	7.13
Limits for Bow, Twist and Wear	6.4	Clamp Installation	7.13
Limits for Bow	6.4	Wire and Cable Clamp Inspection	7.14
Limits for Twist	6.4	Movable Controls Wiring Precautions	7.14
Limits for Wear	6.5	Conduit	7.14
Limits for Ovality	6.5	Heat Shrink Wrapping	7.14
Standard Methods for Checking Shafts, Bearings, and Other Parts	6.5	Wire Shielding	7.15
Checking for Bow	6.5	Junction Boxes	7.16
Clearance Measured By Feeler Gauges	6.5	High-Intensity Radiated Fields (HIRF) Protection Principles	7.16
Checking for Twist	6.5	HIRF Protection	7.16
Piston Engine Connecting Rod Twist	6.5	Soldering Electrical Wires	7.17
Checking for Ovality	6.6	Soldering Wires to a Circuit Board	7.17
Submodule 6 Practice Questions	6.7	Soldering Wires to a Connector	7.18
Submodule 6 Practice Answers	6.8	EWIS Installation, Repair, Maintenance and Cleanliness	7.18
7.7 - ELECTRICAL WIRING INTERCONNECT SYSTEM (EWIS).....	7.1	EWIS Standards	7.18
Continuity, Insulation, Bonding, and Testing	7.1	EWIS Inspection, Repair and Maintenance	7.19
Continuity	7.1	EWIS Cleaning Requirements and Methods	7.20
Insulation	7.1	Submodule 7 Practice Questions	7.21
Bonding and Grounding	7.2	Submodule 7 Practice Answers	7.22
Grounding	7.2	7.8 - RIVETS.....	8.1
Bonding	7.3	Riveted Joints, Rivet Spacing, and Pitch	8.1
Testing of Bonds and Grounds	7.3	Solid Shank Rivets	8.1
Bonding Jumper Installation	7.3	Rivet Head Shape	8.1
Stripping and Crimping Tools; Hand and Hydraulic	7.3	Rivet Construction	8.1
Stripping Wire	7.3	Solid Rivet Types	8.1
Terminal Strips	7.4	Repair Layout	8.2
Pre-Insulated Splices	7.4	Rivet Spacing	8.3
Crimping Tools	7.4	Edge Distance	8.3
Inspection and Testing of Crimped Joints	7.5	Rivet Pitch	8.3
Connector Pin Removal and Insertion	7.5	Transverse Pitch	8.3
Insertion	7.6	Hand Tools	8.3
Removal	7.6	Rivet Cutter	8.3
Adjacent Locations	7.6	Bucking Bar	8.4
Sealing	7.6	Hand Rivet Set	8.4
Drainage	7.6	Dimple Dies	8.4
Coaxial Cables; Testing and Installation	7.7	Chip Chasers	8.4
Testing Coaxial Cable	7.8	Powered Tools	8.4
Identification of Wire Types, Inspection and Damage Tolerance	7.8	Pneumatic Rivet Gun	8.4
Identification of Wire Types	7.8	Rivet Sets and Headers	8.6
Placement of Identification Markings	7.8	Microshavers	8.6
Types of Wire Markings	7.9	Compression Riveting	8.6
Wire Inspection	7.9	Reusable Sheet Metal Fasteners	8.6
Wire Protection: Cable Looms and Support, Clamps, Heat Shrink Wrap and Shielding	7.9	Cleco Fasteners	8.7
Wire Bundles and Routing	7.9	Hex Nut and Wing Nut Fasteners	8.7
Slack in Wire Bundles	7.10	Riveting Procedures	8.7
		Universal Head Rivets	8.7
		Hole Transfer	8.7

TABLE OF CONTENTS

Hole Preparation	8.7	7.11 - BEARINGS	11.1
Drilling	8.7	Testing, Cleaning, and Inspection of Bearings	11.1
Countersunk Rivets	8.8	Testing Bearings	11.1
Countersink Tools	8.8	Cleaning the Wheel Bearings	11.1
Dimpling	8.9	Wheel Bearing Inspection	11.1
Hot Dimpling	8.9	Lubrication Requirements of Bearings	11.3
Dimpling Inspection	8.10	Bearing Handling and Lubrication	11.3
Blind Rivets	8.10	Lubricants	11.3
Friction-Locked Blind Rivets	8.10	Storage	11.3
Mechanical-Lock Blind Rivets	8.11	Defects in Bearings and Their Causes	11.3
Removal of Mechanically-Locked Blind Rivets	8.12	Contamination and Corrosion.	11.3
Inspection of Riveted Joints	8.12	Submodule 11 Practice Questions	11.5
Removal of SOLID Rivets	8.12	Submodule 11 Practice Answers	11.6
Replacing Rivets	8.13	7.12 - TRANSMISSIONS	12.1
Submodule 8 Practice Questions	8.15	Inspection of Gears, Backlash	12.1
Submodule 8 Practice Answers	8.16	Gears	12.1
7.9 - PIPES AND HOSES	9.1	Lash and Pattern	12.1
Metal Tubes and Pipes	9.1	Inspection of Belts and Pulleys, Chains and Sprockets	12.2
Bending and Belling/Flaring Aircraft Pipes	9.1	Belts and Pulleys	12.2
Tubing Sizes	9.1	Chains and Sprockets	12.2
Tube Cutting	9.1	Inspection of Screw Jacks, Lever Devices, and Push-Pull Rod Systems	12.3
Tube Bending	9.2	Jack Screws	12.3
Alternative Bending Methods	9.2	Lever	12.3
Tube Flaring	9.3	Push-pull Rod Systems	12.3
Rolling Type Flaring Tools	9.4	Submodule 12 Practice Questions	12.5
Double Flaring	9.4	Submodule 12 Practice Answers	12.6
Beading	9.4	7.13 - CONTROL CABLES	13.1
Flexible Hoses	9.6	Swaging of End Fittings	13.1
Flexible hose Size Designations	9.6	Splicing	13.3
Fabrication and Replacement of Flexible Hoses	9.6	Swaged Ball Terminals	13.3
Inspection and Testing of Pipes and Hoses	9.6	Cable Slippage In Terminal	13.3
Rigid Tubing Inspection	9.6	Nicopress® Swaged End Fittings	13.3
Flexible Hose Inspection	9.6	Inspection and Testing of Cables	13.4
Flexible Hose Testing	9.6	Manufacturer Wire Splices	13.6
Installation of Pipes and Hoses	9.7	Testing Cable Tension	13.6
Rigid Tube Installation and Inspection	9.7	Aircraft Flexible Control Systems	13.6
Connection and Torque	9.7	Cable System Installation	13.6
Flareless Tube Installation	9.7	Cable Guides	13.6
Hose Clamps	9.8	Bowden Cable Systems	13.7
Installation of Flexible Hose Assemblies	9.10	Teleflex Cable Systems	13.7
Submodule 9 Practice Questions	9.11	Submodule 13 Practice Questions	13.9
Submodule 9 Practice Answers	9.12	Submodule 13 Practice Answers	13.10
7.10 - SPRINGS	10.1	7.14.3 - ADDITIVE MANUFACTURING	14.1
Inspection and Testing of Springs	10.1	Common Additive Manufacturing Techniques	14.1
Visual Inspection	10.1	Additive Manufacturing Techniques	14.1
Static Measurement	10.1	Methods of Additive Manufacturing	14.1
Corrosion	10.1	Vat Photopolymerization	14.1
Overheating	10.2	Binder Jetting	14.1
Fatigue	10.2	Material Extrusion	14.2
Load Deflection	10.2	Ultrasonic Additive Manufacturing	14.2
Squareness Inspection of Valve Springs	10.2	Powder Bed Fusion	14.2
Submodule 10 Practice Questions	10.3	Directed Energy Deposition	14.2
Submodule 10 Practice Answers	10.4		

TABLE OF CONTENTS

Finishing Parts after Printing	14.2	Grounding and Bonding	17.15
Mechanical Properties of Finished Parts	14.2	Fueling Procedures	17.15
Inspection of Additive Manufactured Parts and Common		Over the Wing Refueling	17.15
Production Failures	14.3	Pressure Refueling	17.15
Common Production Failures	14.3	Defueling	17.17
Inspection of Additive Manufactured Parts	14.3	De-icing/Anti-Icing Procedures	17.17
Ultrasonic Testing	14.3	De-icing and Anti-icing of Transport Aircraft	17.17
Radiographic Testing	14.3	Deicing Fluid	17.17
CT Scans	14.3	Holdover Time (HOT)	17.17
Eddy Current Testing	14.3	Critical Surfaces	17.17
7.15 - RESERVED.....	15.1	Frost Removal	17.19
This submodule is reserved by EASA for future use.	15.1	Ice and Snow Removal	17.19
7.16 - AIRCRAFT WEIGHT AND BALANCE.....	16.1	Electrical, Hydraulic and Pneumatic Ground Supplies	17.19
This submodule is not required for Cat-A certification.	16.1	Electric Ground Power Units	17.19
7.17 - AIRCRAFT HANDLING AND STORAGE.....	17.1	Hydraulic Ground Power Units	17.20
Aircraft Taxiing/Towing and Associated Safety Precautions.	17.1	Ground Support Air Units	17.20
Engine Starting and Operations	17.1	Ground Air Heating and Air Conditioning	17.20
Reciprocating Engines	17.1	Oxygen Servicing Equipment	17.20
Hand Cranking Engines	17.2	Oxygen Hazards	17.21
Turboprop Engines	17.3	Air/Nitrogen, Oil, and Fluid Servicing	17.21
Turboprop Starting Procedures	17.3	Effects of Environmental Conditions on Aircraft Handling and	
Turbofan Engines	17.4	Operation	17.21
Starting a Turbofan Engine	17.4	Submodule 17 Practice Questions	17.23
Auxiliary Power Units (APUs)	17.6	Submodule 17 Practice Answers	17.24
Unsatisfactory Turbine Engine Starts	17.6	7.18 - DISASSEMBLY, INSPECTION, REPAIR, AND	
Hot Start	17.6	ASSEMBLY TECHNIQUES	18.1
False or Hung Starts	17.6	Introduction	18.1
Engine Will Not Start	17.6	Section A	18.1
Extinguishing Engine Fires	17.6	Types of Defects and Visual Inspection	18.1
Taxiing Aircraft	17.6	Basic Inspection Techniques and Practices	18.1
Taxi Signals	17.7	Preparation	18.1
Towing Aircraft	17.7	Aircraft Logs	18.2
Aircraft Jacking, Chocking, Securing, and Associated		Checklists	18.2
Safety Precautions	17.10	Publications	18.2
Aircraft Jacking	17.10	Manufacturers' Service Bulletins and Instructions	18.2
Tiedown, Chocking and Securing	17.11	Maintenance Manuals	18.2
Securing Light Aircraft	17.11	Overhaul Manual	18.2
Securing Heavy Aircraft	17.11	Structural Repair Manual	18.2
Tiedown Procedures for Seaplanes	17.12	Illustrated Parts Catalog	18.2
Tiedown Procedures for Skiplanes	17.12	Visual Inspection Techniques	18.2
Tiedown Procedures for Helicopters	17.13	Types of Defects	18.2
Aircraft Storage Methods	17.13	External Damage	18.3
Hangars	17.13	Inlets and Exhausts	18.3
Fire Precautions	17.13	Liquid Systems	18.3
Storage Processes	17.14	Gaseous Systems	18.3
Phase 1 – Preparation	17.14	Landing Gear	18.3
Phase 2 – Routine Servicing	17.14	System Indicators and Gauges	18.3
Phase 3 – Repreparation In Storage	17.14	Probes	18.3
Phase 4 – Return To Service	17.14	Handles, Latches, Panels and Doors	18.4
Refueling/Defueling Procedures	17.14	Other Inspection Items	18.4
Fuel Types and Identification	17.14	Life Limited Items	18.4
Contamination Control	17.14	Corrosion Removal, Assessment and Reprotection	18.5
Fueling Hazards	17.15	Preventive Maintenance	18.5
		Corrosion Removal	18.5
		Surface Cleaning and Paint Removal	18.5

TABLE OF CONTENTS

Corrosion of Ferrous Metals	18.5	Submodule 19 Practice Questions	19.7
Mechanical Removal of Iron Rust	18.6	Submodule 19 Practice Answers	19.8
Chemical Removal of Rust	18.6		
Removal of Corrosion from Highly Stressed Steel Parts	18.6	7.20 - MAINTENANCE PROCEDURES	20.1
Corrosion of Aluminum and Aluminum Alloys	18.6	Maintenance Planning	20.1
Treatment of Unpainted Aluminum Surfaces	18.7	Modification Procedures	20.1
Treatment of Anodized Surfaces	18.7	Stores Procedures	20.2
Corrosion of Magnesium Alloys	18.8	Certification and Release Procedures	20.3
Treatment of Wrought Magnesium Sheet and Forgings	18.8	Interface with Aircraft Operation	20.3
Treatment of Installed Magnesium Castings	18.8	Maintenance Inspection/Quality Control/Quality Assurance	20.3
Protection of Dissimilar Metal Contacts	18.8	Additional Maintenance Procedures	20.3
Contacts Not Involving Magnesium	18.9	Control of Life-limited Components	20.4
Contacts Involving Magnesium	18.9	Submodule 20 Practice Questions	20.5
Corrosion Limits	18.9	Submodule 20 Practice Answers	20.6
Surface Preparation	18.9		
Chemical Treatments	18.9	7.21 - DOCUMENTATION AND COMMUNICATION	21.1
Anodizing	18.9	Documentation	21.1
Alodizing	18.10	Task Cards	21.1
Chemical Surface Treatment and Inhibitors	18.10	Work Reports / Technical Records	21.1
Chromic Acid Inhibitor	18.10	Personal Logbooks	21.1
Sodium Dichromate Solution	18.10	Troubleshooting Reports	21.2
Protective Paint Finishes	18.10	Shift Handover Instructions	21.2
Section B	18.10	The Handover Procedure	21.2
Disassembly and ReAssembly Techniques	18.10	Communication	21.3
Replacement of Major Components and Modules	18.11	Listening	21.3
Disassembly and Reassembly of Major Components	18.11	Asking Questions	21.3
Disassembly and Reassembly of Minor Components	18.11	Written Communication	21.3
Basic Disassembly and Reassembly Techniques	18.11	Basic Elements of Communication	21.3
Discarding of Parts	18.12	The Receiver	21.3
Freeing Seized Components	18.12	Effective Communication	21.3
Assembly	18.12	Clarity	21.3
Submodule 18 Practice Questions	18.13	Comprehensive	21.3
Submodule 18 Practice Answers	18.14	Concise	21.4
		Barriers to Effective Communication	21.4
7.19 - ABNORMAL EVENTS	19.1	Lack of Common Experience	21.4
Special Inspections	19.1	Lack of Precision	21.4
Inspection following Lightning Strikes and HIRF Penetration	19.1	Interference	21.4
Lightning Strikes	19.1	Writing Reports and Essays	21.4
High Intensity Radiated Fields (HIRF) Penetration	19.2	How to Write an Essay Answer	21.4
Specific Testing - HIRF	19.2	Study the Question	21.4
HIRF Test Equipment	19.3	Planning	21.4
Signal Pulse Generators	19.3	Writing the Essay	21.4
Pulse Amplifiers	19.3	Hints and Tips	21.5
RF Power Meters	19.3	Submodule 21 Practice Questions	21.7
EMC Antennas	19.3	Submodule 21 Practice Answers	21.8
Inspection Following Heavy Landings or Flight Through Turbulence	19.3		
Hard or Overweight Landings	19.3	Acronym Definitions	A.1
Post Heavy Landing Inspection	19.3		
Severe Turbulence Inspection	19.4		
Other Types of Damage	19.4		
Fire Damage	19.4		
Flood Damage	19.5		
Seaplanes	19.5		
Aerial Application Aircraft	19.5		

The inside of these tanks usually have spar and rib structures with various size and shape access holes between sections. Some wing center tanks, as well as many auxiliary tanks, are equipped with flexible fuel bladders. These bladders must be fastened in some manner to the metal walls, floors, and ceiling of integral tanks.

PREPARATION FOR ENTRY

Several steps must be completed prior to entering the fuel tank. These include electrically grounding and defueling the airplane, making adequate fire protection equipment readily available, and deactivating associated airplane systems such as fueling/defueling and fuel transfer systems. Three final steps must be performed to ensure a safe atmosphere for maintenance personnel.

ENSURING ADEQUATE VENTILATION

The single most important method of controlling the hazards associated with working in a fuel tank is ventilation. The more fresh air that is present in the tank, the safer the environment will be. Continuously pushing fresh air into a fuel tank helps to prevent a fuel vapor concentration from reaching its LFL. Fresh air also dilutes the toxic chemicals, reducing the risk of hazardous exposure. High volumes of fresh air will also prevent oxygen deficiency. Normal concentration of atmospheric oxygen in air is about 21 percent. At levels below 19.5 percent a person will begin to exhibit signs of oxygen starvation, including headache, nausea, drowsiness, and slurred speech. At increasingly lower concentrations, more severe reactions occur; ultimately death by asphyxiation. Oxygen deficiency is often caused by physically displacing the oxygen in a space. For example, pumping nitrogen into a fuel tank to prevent ignition will cause the oxygen concentration to decrease.

VENTILATION TECHNIQUES

The physical structure of airplane fuel tanks such as dead air spaces and small openings between tank sections which inhibits air flow presents challenges in ensuring adequate ventilation. Ventilation equipment must be properly set up before entry is accomplished. The recommended method for conducting tank ventilation is the push-pull technique. First, an upstream "push" access hole should be opened. Next, a downstream "pull" hole should be opened. Finally, a blower should be located at the push hole, forcing fresh air into the tank. Exhaust fans can also be located at the pull hole to supplement the airflow through the tank.

MONITORING AIR IN FUEL TANKS

To determine if the atmosphere in the tank is suitable for entry, the conditions should be continuously monitored for oxygen concentration, flammable and toxic vapor concentration. Entry may not be permitted unless the oxygen concentration is between 19.5 - 23.5 percent. [Figure 1-5]

Instruments are available that can simultaneously monitor the oxygen and flammable vapor concentration, but the measurement of oxygen is the most critical. Measurements outside of the permitted range can also cause faulty readings of other devices used to detect flammable vapors. Monitoring instruments must be calibrated for the type of vapor determined to be present. For Jet-A-type jet fuels, a monitor calibrated with hexane will be reasonably accurate. If other types of fuels or chemicals are present, the monitor must be calibrated for those vapors.

CONDITIONS REQUIRED FOR ENTRY

The most important factor in preventing injury during fuel tank work is a properly trained and equipped entry crew. The entry crew is composed of the entrant, the entry supervisor and a standby attendant. The supervisor authorizes the work and ensures it is conducted according to procedure. The standby attendant stays outside of the tank to monitor conditions in and around the work area and is authorized to order evacuation if conditions change and put the entry person at risk. Entry personnel must be able to recognize potential hazards and evacuate the tank if working conditions deteriorate.

COMMUNICATION

Continuous voice communication should be maintained between the entrant and the standby attendant throughout the process. Voice communication can be assisted by radio as long as the device is rated for use in potentially flammable atmospheres.

RESPIRATORY PROTECTION

Entry personnel must wear a respirator. Air-purifying respirators can be used if the oxygen concentration is at above 19.5 percent. If the potential exists for further depletion supplied-air respirators are required. [Figure 1-6]

ELECTRICALLY POWERED EQUIPMENT

Technicians may need to use a variety of energized equipment including lighting, testing equipment, and powered tools. All electric powered equipment must be rated for use in a flammable atmosphere. All pneumatic tools should be powered only by compressed air, not by nitrogen or other inert gases that could displace the oxygen inside the tank.



Figure 1-5. An oxygen deficiency monitor is critical for personnel working in fuel tanks.



Figure 1-6. A high quality respirator is always required equipment to enter a fuel tank.

AIRPLANE DAMAGE CONSIDERATIONS

Personnel performing fuel tank work may damage the airplane if they are not trained to avoid such damage. The mating surfaces of the access hole and covers should be protected during entry so that the surfaces are not scratched or otherwise damaged. Components inside the tanks, such as fuel pumps, quantity systems and associated wiring and conduits are also vulnerable if they are struck or dislodged. Finally, the containment properties of the fuel tank can be compromised if the sealant is dislodged or if fuel tank bladders are penetrated.

BALLISTIC RECOVERY SYSTEMS

AWARENESS AND PRECAUTIONS REGARDING BALLISTIC RECOVERY SYSTEMS

BASIC UNDERSTANDING

Once the domain of microlights and small homebuilt aircraft, ballistic recovery systems can now be found on many general aviation aircraft including Cessna, Cirrus and even some light jets. These systems are designed as a last resort in the event of a collision, structural failure or engine failure over inhospitable terrain. While these events are extremely rare, the principle manufacturer claims over 380 "saves" to date, and many light aircraft manufacturer's now offer this option to ease the fears of buyers. Therefore, it not be uncommon for a light aircraft AMT to come across these systems in their daily work. [Figure 1-7]

PRIMARY COMPONENTS

Most ballistic recovery systems are rocket fired where a small solid fueled rocket type device pulls the parachute from its container stored inside the aircraft. However, some older systems operate more like a mortar where an explosive charge pushes the tightly packed canopy from a tube. In either case, the principle components of all systems include the parachute itself (canopy, suspension lines and risers), a pyrotechnic device and its igniter, an in-cockpit actuation handle, and the various structural components to house these parts and attach them to the aircraft.

In the event of an emergency, the system is activated by the pilot via an actuation handle in the cockpit. [Figure 1-8] The handle activates a rocket motor which extracts a harness and the packed



Figure 1-8. An actuation handle with its remove-before-flight safety pin in place.

canopy from its container located inside the aircraft. Once the canopy is extended it unfurls and lowers the aircraft at a survivable rate. [Figure 1-9]

SAFETY AROUND BALLISTIC RECOVERY SYSTEMS

The primary safety concern when working with or near ballistic systems is the unintentional firing of the rocket itself. Being struck by this device exiting the aircraft can be fatal. Never position yourself or allow others in the potential path of the rocket device. When handling a device that is not installed on the aircraft be aware of where the rocket is pointed at all times. Treat the device like a loaded gun. Even with the safety flag installed in the activation handle, know that a potential for an unintentional firing still exists, particularly if the device has been subjected to shock or high Gs. Mishandling or attempting to modify the igniter, rocket or any other component of a ballistic system can also cause an unintentional firing.

INSPECTION AND MAINTENANCE

Preflight and other inspections of ballistic parachute systems are primarily for a system's cleanliness, contamination, corrosion and other damage, and for the proper and secure attachment of all components; particularly the actuation handle, bridals and other attach points to the airframe. The parachute container must be



Figure 1-7. A ballistic parachute recovery of a Cirrus SR22.



Figure 1-9. The firing sequence of a rocket propelled parachute system.

properly sealed, dry, and free of oils or other contamination. Defects involving the installation of components to the airframe and basic cleanliness may be corrected by the AMT. There are no user or AMT serviceable parts in a ballistic parachute system. Defects involving damage to any component, including loose, wet, or contaminated seals must be referred to the manufacturer.

Manufacturers have set required service limits for both the parachute repacks and pyrotechnic and rocket replacements. For the canopy, a 5-6 year required factory repack for sealed units is typical, or sooner if damage or contamination is present. A canopy which has inadvertently been opened or removed from its container must be factory repacked before returning to service. Rocket devices typically require replacement every 10 years. In all cases, contact the manufacturer for further details.

INSTALLATION AND REMOVAL

Certain items are critical for the installation of any ballistic parachute system. Among them are the following:

- Mounting of the container and rocket assembly to the airframe.
- Correct routing of cables and bridle system to the airframe.
- Routing and securing of the activation handle.
- Direction of rocket fire in relation to the airframe.

Many other installation concerns exist. Seeking factory instructions and checklists are advised. In all situations it is advisable to seek instruction from the system's manufacturer and further confirmation after installation that you have done the job correctly. [Figure 1-10 and 1-11]

Removal of systems is similar to other devices with the exception of the highest attention required when working around the activation mechanisms and awareness of where the device is "pointed" at all times.



Figure 1-10. The internal mounting of a ballistic parachute system in a Cessna 182. Notice the rocket firing position through the rear window.

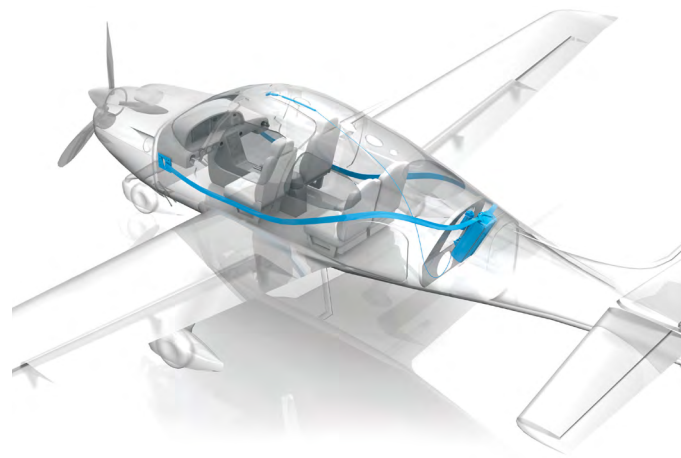


Figure 1-11. Drawing shows the placement of the parachute system and its supporting harness on a Cirrus SR22sys.

FIRE SAFETY

Performing maintenance on aircraft and their components requires the use of electrical tools that can produce sparks, heat producing tools and equipment, flammable and explosive liquids and gasses. As a result, a high potential exists for fire to occur. Measures must be taken to prevent a fire from occurring and to have a plan for extinguishing it if it does.

The key to fire safety is knowledge of what causes a fire, how to prevent it, and how to put it out. This knowledge must be instilled in each technician, emphasized by their supervisors through sound safety programs, and occasionally practiced. Airport or other local fire departments can normally be called upon to assist in training personnel and helping to establish fire safe programs for the hangar, shops, and flight lines.

REQUIREMENTS FOR A FIRE TO OCCUR

Three things are required for a fire. Remove any one of these things and the fire extinguishes: [Figure 1-12]

1. Fuel – combines with oxygen in the presence of heat, releasing more heat. As a result, it reduces itself to other chemical compounds.
2. Heat – accelerates the combining of oxygen with fuel, in turn releasing more heat.
3. Oxygen – the element that combines chemically with another substance through the process of oxidation. Rapid oxidation, accompanied by a noticeable release of heat and light is called combustion or burning.

CLASSIFICATION OF FIRES

Fire classification and extinguisher identifying labels differ throughout the world with the most common systems being those of Europe and Australia and those in the United States. [Table 1-1]

ORDINARY COMBUSTIBLES

Class A fires consist of ordinary combustibles such as wood, paper, fabric, and most kinds of trash. The European system categorizes this material as A1 for normal combustibles and A2 for fire resistant combustibles. The US system categorizes all as simply Class A.







FIRE CLASSES		EUROPEAN STANDARD	UNITED STATES STANDARD	SUITABLE SUPPRESSION
	Combustible Materials (Wood, Paper, Fabric, etc.)	Class A1/A2	Class A	Most Suppression Techniques
	Flammable Liquids	Class B	Class B	Dry Chemical or Halon
	Flammable Gases	Class C	Class B	Dry Chemical or Halon
	Flammable Metals	Class D	Class D	Specialist Suppression Required
	Electrical Fires	Class E	Class C	Same as Combustibles, but conductive agents such as water should not be used
	Cooking Oils and Fats	Class F	Class K	Removal of Oxygen

Table 1-1. Fire classes chart.



Figure 1-12. The fire triangle; all three elements shown are required for fire to occur.

FLAMMABLE LIQUID AND GAS

The US system designates all liquid and gas fires as Class B. In the European/Australian system, flammable liquids are designated Class B having flash point less than 100°C; while gases are designated Class C. A solid stream of water should never be used because it can cause the fuel to scatter, spreading the flames. The most effective way to extinguish a liquid or gas fire is by inhibiting the chemical reaction of the fire with dry chemical and Halogenated agents.

ELECTRICAL

Electrical fires involve energized electrical equipment. The US system designates these Class C while the European/Australian system designates them Class E. This sort of fire may be caused by short-circuiting machinery or overloaded electrical cables. These fires are a hazard when using water or other conductive agents, as electricity may be conducted from the fire, through water, to the fire fighter's body, and then earth. If the fire is electrically energized, it can be fought with any agent rated for electrical fire such as carbon dioxide or dry chemical powder. Once electricity is shut off, it will generally become an ordinary combustible fire.

METAL

Class D fires involve combustible metals like lithium, potassium, and alkaline metals such as magnesium, and group 4 metals such as titanium and zirconium. Metal fires represent a unique hazard because people are often unaware of the characteristics and not properly prepared to fight them. Certain metals such as sodium burn in contact with air or water which exacerbates this risk. Generally speaking, masses of combustible metals do not represent great fire risks because heat is conducted away from hot spots so efficiently that the heat of combustion cannot be maintained. As so, significant heat energy is required to ignite a mass of metal. Generally, metal fires are a hazard when the metal is in the form of dust or shavings which combust more rapidly than large blocks. Care must be taken when extinguishing metal fires. Water and other common agents can excite metal fires and make them worse. Fire protection agencies recommend that metal fires be fought with dry powder that works by smothering and heat absorption. Different metals require different agents which cannot always be substituted for another. The most common agents are sodium chloride and graphite powder. Using a dry chemical extinguisher in error, in place of dry powder, can actually increase the intensity of a metal fire.

COOKING OILS

Fires that involve cooking oils are designated Class K. Though such fires are technically a subclass of the flammable liquids, the higher flash points are important enough to recognize separately. A class K extinguisher will smother the fire by turning the oil into a foam. A water mist can also extinguish such fires. As with Class B, a solid stream of water should never be used because it can cause the fuel to scatter.

EUROPEAN STANDARDS

The European classification system EN-13501-1 further breaks down these designations as:

- Fire behavior:
- Class A1 (highest level)